(19) World Intellectual Property Organization International Bureau

18 November 2004 (18.11.2004)

556135

(43) International Publication Date

PCT

(10) International Publication Number WO 2004/098982 A1

(51) International Patent Classification7:

B62D 35/00

(21) International Application Number:

PCT/SE2004/000609

(22) International Filing Date: 22 April 2004 (22.04.2004)

(25) Filing Language:

Swedish

(26) Publication Language:

English

(30) Priority Data:

0301352-1

9 May 2003 (09.05.2003)

(71) Applicant (for all designated States except US): SCANIA CV AB (publ) [SE/SE]; S-151 87 Södertälje (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): LÖGDBERG, Ola [SE/SE]; Kungstensgatan 53 A, S-113 59 Stockholm (SE).

(74) Agent: FORSELL, Hans; Scania CV AB, Patents, S-151 87 Södertälje (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND ARRANGEMENT FOR CONTROLLING AIR RESISTANCE

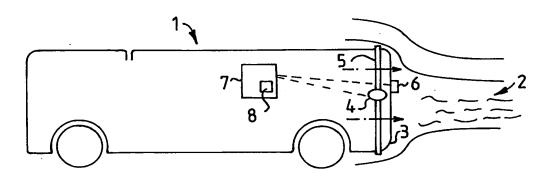

(57) Abstract: The invention relates to a method for regulating during driving the air resistance to a leading and at least one following vehicle, whereby the distance from the following vehicle is detected and the magnitude of a wake formed behind the leading vehicle is regulated according to the detected distance in order to optimise the overall air resistance to the leading and the following vehicle. The invention also relates to a device and a computer program and a computer program product for implementing the method.